





FA 20 103 XX


P. 1 | 2

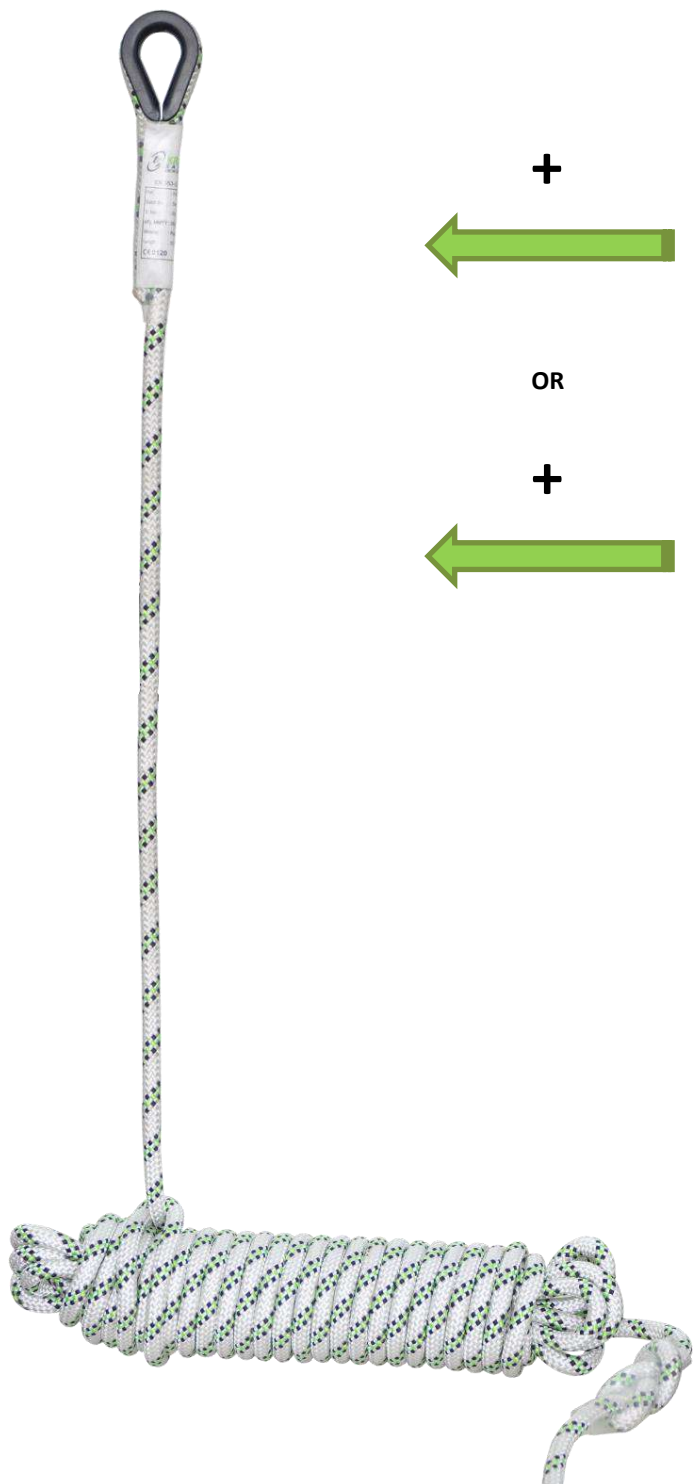

BLOCKER

FA 20 103 00A





OR



LOREL

FA 20 103 00B

HS CODE
56090000
CARTON SIZE / PCS.
FA 20 103 10, FA 20 103 15 : 60 x 40 x 24 cm / 10
FA 20 103 20 : 40 x 40 x 24 cm / 5
FA 20 103 30 : 60 x 40 x 24 cm / 5
FA 20 103 40 : 80 x 40 x 24 cm / 5
FA 20 103 50 : 80 x 40 x 24 cm / 4
AET N°2777/10858-04/E03-01
AET N°2777/10860-03/E02-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16028-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom


REF.	FA 20 103 10	FA 20 103 15	FA 20 103 20	FA 20 103 30	FA 20 103 40	FA 20 103 50
LG.  KG	10 m	15 m	20 m	30 m	40 m	50 m
	MAX. 140 KG (FA 20 103 00A) MAX. 100 KG (FA 20 103 00B)					
CE	EN 353-2:2002, EN 358:2018					
MAT.	PA Ø 11 mm					
	NO					
	---					
R(kN)	15 kN					
+	FA 20 103 00A, FA 20 103 00B					
	1.50 kg	2.02 kg	2.55 kg	3.60 kg	4.65 kg	5.70 kg



Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers



Matière connecteur
 Material of connector
Material conector
 Materiale connettore
Material des Verbinders



Coulisseau doté d'un point fixe
 Rope grab with a fixed point lock
Corredera provista de punto fijo
 Guida a punto fisso
Gleitelement mit Festpunkt

+

À utiliser avec
 To be used with
Para usar con
 Ad essere utilizzato con
Verwendet werden soll mit